



UPPER PLATE MOUNTING DETAIL



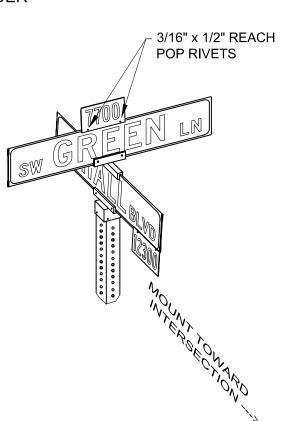

LOWER PLATE MOUNTING DETAIL

NOTES:

- 1. Flat blanks shall be 0.060-inch gauge with 6063 T6 alodine coated aluminum substrate.
- 2. Both sides of block number plate shall be green *3M Scotchlite* brand High Intensity Reflective sheeting.
- 3. All numbers shall be 3-inch series "B", silver *3M Scotchlite* brand High Intensity Reflective sheeting.
- 4. Always mount lower plate on the side nearest to intersection
- 5. For street name sign and mounting, see Beaverton Standard Dwg 411.



ENGINEERING
DEPARTMENT

BLOCK NUMBER PLATE MOUNTING

TRAFFIC ENGINEER	DATE	DRAWN BY	DRAWING NO.
Randall R. Wooley	6 - 10 - 04	CG - CPD	412